


# COZY

## Direct Vent Gas-Fired Baseboard Heaters

www.cozyheaters.com

*Cozy Comfort...with our Warmest Regards!*

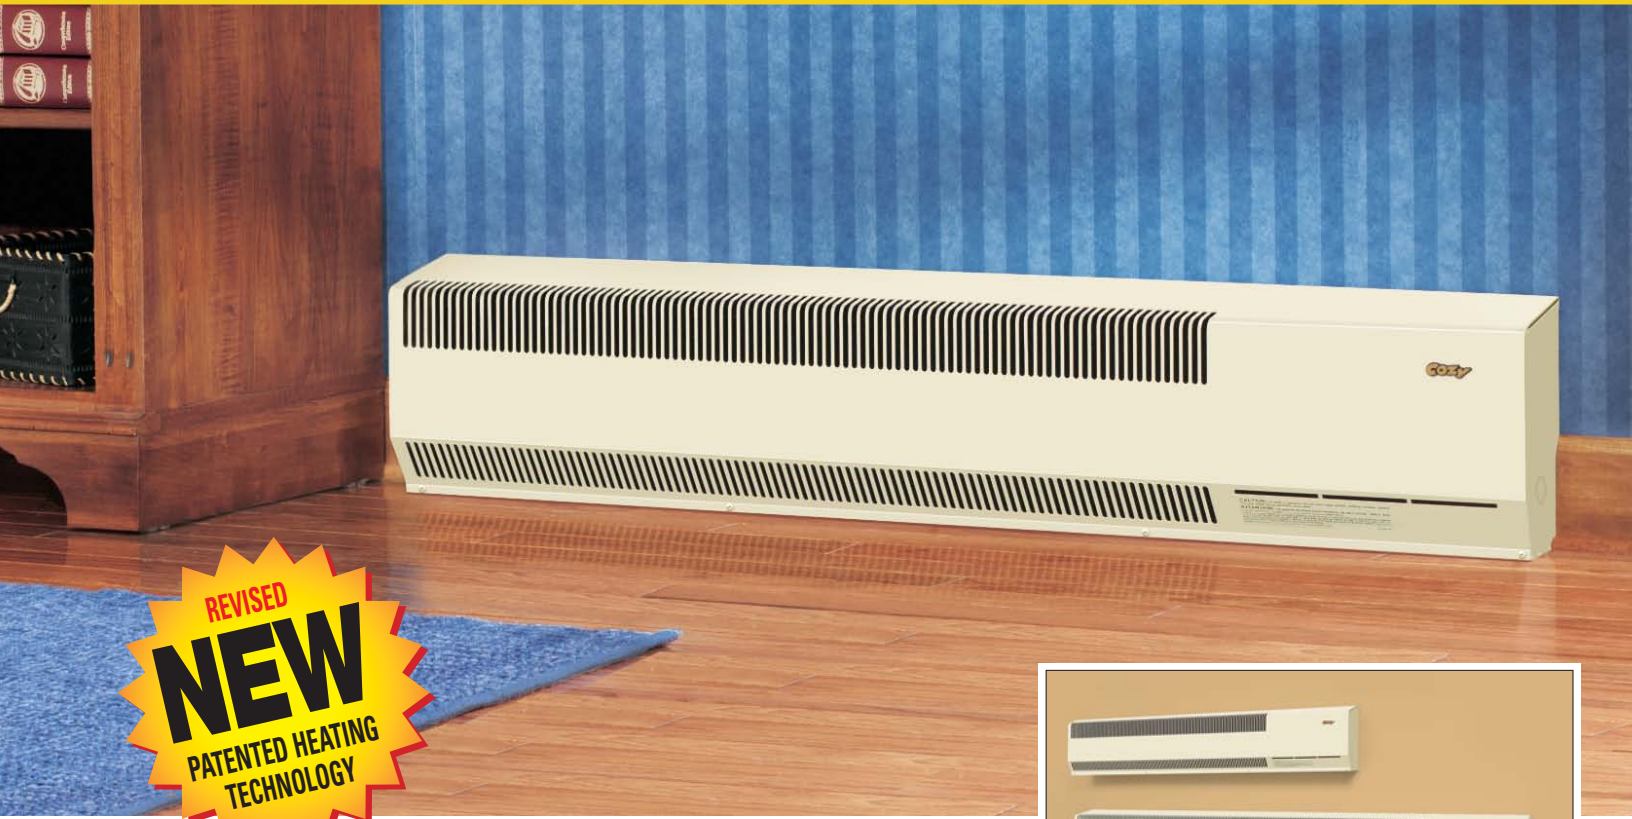

REVISED  
**NEW**  
PATENTED HEATING  
TECHNOLOGY



The patented **COZY** Gas-Fired, Direct Vent Baseboard Heater is **new** and **unique** from any gas heater currently offered! With high efficiency and state-of-the-art styling, it is a perfect answer in the following heating applications and installs on **any outside wall**:

- Retrofitting expensive electric baseboard heaters (approximately 75% less operating cost).
- Single and multi-family dwellings, high-rise, commercial and manufactured housing applications.
- Transitional entryways, under-window installations.
- Residential add-ons and sun porch applications.
- Cold-spots, or any application where **space is at a premium!**

**COZY** gas-fired baseboard technology was developed by three utility companies in Canada. They are eminently reliable and safe. Cozy Baseboard Heaters are approved for use in mobile home applications. Always consult with your local building code officials.

### FEATURES INCLUDE:

- Two models 5,000 BTU (4 Ft.) and 9,000 BTU (6 Ft.) to choose from.
- 24 Volt wall thermostat (115 volt required) standard.
- Power cord (6 Ft. on 5,000 BTU, 9 Ft. on 9,000 BTU).
- Transistorized, self diagnosing ignition module.
- Ball valve with 4" flex connector standard.
- Tubular, aluminized combustion chamber warranted for 10 years – no pro rata.
- High efficient in-shot burner.
- Standard vent fits any 4" – 16" outside wall application.
- Sealed combustion, draws no room air and exhausts unburned flue products to the outside.
- Reliable direct spark igniter (standard).
- Requires only a 2-1/2" wall opening (standard).
- Up to three (3) units may be operated in series on one wall thermostat.
- Flame proving, automatic draft induced control assures maximum efficiency and safety.
- Vent may be installed from the inside for multi-story applications (See Vent Weather Seal Kit).

# LTS

Manufacturers of Heating Equipment Since 1888



# GOZY Comfort & Hi-Efficiency!



5,000 BTU  
(Face Off)  
48" (122 cm)



9,000 BTU  
(Face Off)  
72" (183 CM)

## STANDARD ITEMS




4"-16" Vent System (Standard)



Standard Vent with  
1-1/2" I.D. Seal

Direct Spark Ignition  
Module Self-Diagnosing

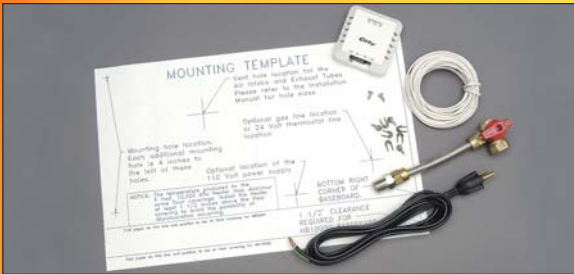

Mounting Template, 24 Volt Wall T-Stat Kit, Power Cord  
and Flex Connector with Ball Valve

## OPTIONAL ACCESSORIES



Side Valve Concealer



Bottom Valve Concealer



Inside Finish



Outside Finish

Vent Weather Seal Kit with  
2" I.D. Seal



Vent Riser Kit - VRK5/10

## SPECIFICATIONS

| Model No. | Input BTU/Hr. | Watts | Type Gas | Type Control | AFUE  | Width | Depth  | Height | Gas Conn. | Voltage | Minimum Center of Vent to Floor | Wall Opening | Wall Max Thickness | Wall Min Thickness | Ship Weight |
|-----------|---------------|-------|----------|--------------|-------|-------|--------|--------|-----------|---------|---------------------------------|--------------|--------------------|--------------------|-------------|
| BBT53     | 5,000         | 33.3  | Nat.     | 24 Volt      | 73.0% | 48"   | 5-3/8" | 9-3/8" | 3/8"      | 115V    | 7-3/4"                          | 2-1/2"*      | 16"                | 4"                 | 46 lbs      |
| BBT54     | 5,000         | 33.3  | L.P.     | 24 Volt      | 73.0% | 48"   | 5-3/8" | 9-3/8" | 3/8"      | 115V    | 7-3/4"                          | 2-1/2"*      | 16"                | 4"                 | 46 lbs      |
| BBT103    | 9,000         | 34.3  | Nat.     | 24 Volt      | 80.4% | 72"   | 5-3/8" | 9-3/8" | 3/8"      | 115V    | 7-3/4"                          | 2-1/2"*      | 16"                | 4"                 | 62 lbs      |
| BBT104    | 9,000         | 34.3  | L.P.     | 24 Volt      | 80.4% | 72"   | 5-3/8" | 9-3/8" | 3/8"      | 115V    | 7-3/4"                          | 2-1/2"*      | 16"                | 4"                 | 62 lbs      |

NOTE: Conversion Kits are available for Nat. or L.P. Gas (specify existing model no.)  
\* Standard - with Vent Weather Seal Kit - 3" opening

## Louisville Tin & Stove Co.

INCORPORATED

P.O. BOX 2767 • LOUISVILLE, KENTUCKY 40201-2767

PHONE: (502)589-5380 • FAX: (502)589-5382

WWW.cozyheaters.com

cozyinfo@aol.com



Manufacturers of heating equipment

for over 122 years

