

COZY

High-Efficient Direct Vent Furnaces

*Cozy Comfort...
with our Warmest
Regards!*



The New **COZY HIGH EFFICIENT DIRECT VENTS** (80% + AFUE) are a perfect heating solution for single family residential, rental, summer/winter cabin, below grade and efficiency apartment heating applications. They mount easily on any outside wall or, if vent/exhaust extensions are used, more centrally into the space to be heated. The sealed combustion chamber draws air for combustion from out of doors and also exhausts the products of combustion to the outside. These 24 volt, draft induced units, include a standard vent kit that can be cut to fit wall thicknesses from 5"- 32" and includes the external vent cap. This eliminates expensive venting and unnecessary labor expense.

Features Include:

- Two models to choose from: 25M BTU and 40M BTU
- 24 Volt System (115 volt required)
- Transistorized controls (Self-Diagnosing)
- Tubular, aluminized combustion chambers warranted for 10 years – no pro rata
- In-shot burners
- Vent/exhaust extension kits available for below grade snorkel applications (Right/left or vertical takeoff)
- Neutral Bone high-temp baked enamel casing paint
- Wall Thermostat (Standard)
- Small silhouette vent cap standard
- Automatic, draft induction blower system
- Only requires 3-1/2" outside wall opening
- Counterflow, warm-floor blower action



HEDV 25

Colors shown are printed reproductions. For exact colors ask Cozy for an actual color sample.

LTS &

Manufacturers of Heating Equipment Since 1888



LIMITED WARRANTY
ON COMBUSTION
CHAMBER

www.cozyheaters.com


GOZY Comfort with 80% Efficiency!




Tubular Aluminized Heat Exchanger enhances efficiencies and carries a 10 year warranty with no pro rata.




Standard Above Grade Vent Kit can be cut to fit 5" to 32" wall thickness. Diameter of wall opening is only 3-1/2".

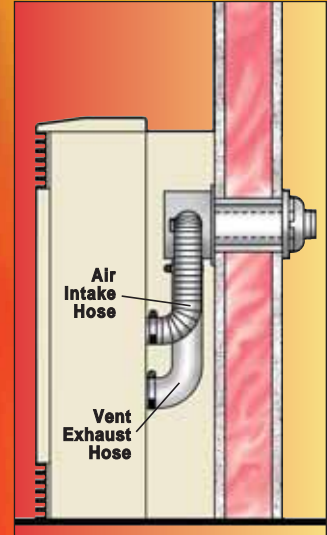

OPTIONAL:
HEVK-5 5' Vent Exhaust Kit
Includes one (1) 6' Black Flex Intake Pipe, (1) 5' Flocked Exhaust Tube, (2) 3" Couplings, (3) Support Brackets, (3) 2" Hose Clamps. (NOTE: 15' maximum with three [3] vent exhaust kits.)

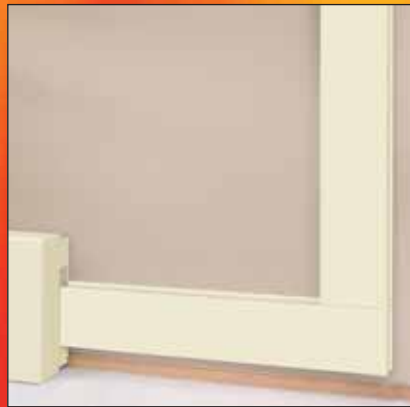

OPTIONAL:
HEVE-5 Vent Enclosure Kit
Includes one (1) 5' Enclosure Body, (1) End Cap, (1) 24" Section Flexible Trim Strip.

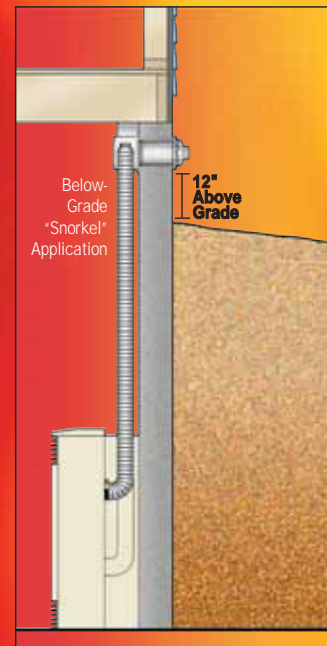

OTHER OPTIONAL ACCESSORIES

HEEL-1 90° Elbow Kit

Contains one (1) 90°, 2 inch aluminized, silicon wrapped steel elbow.

(NOTE: May not use more than three [3] on any unit installation—one [1] comes with the unit.)

HECK-1 Condensate Kit

Contains one (1) 1/4 inch stainless steel tube-type p-trap with 6" plastic drain tube.

SPECIFICATIONS

MODEL NUMBER	TYPE GAS	INPUT BTU/HR.	WIDTH	CABINET DEPTH	HEIGHT	WEIGHT	TYPE CONTROL	AMPS	CFM	CENTER VENT TO FLOOR	GAS CONNECTION
HEDV253A	NAT.	25,000	24-1/2"	*9-3/4"	32-1/4"	100	24 Volt	1.88	200	12-1/2" adj.	3/8"
HEDV254A	L.P.	25,000	24-1/2"	*9-3/4"	32-1/4"	100	24 Volt	1.88	200	12-1/2" adj.	3/8"
HEDV403A	NAT.	40,000	34-5/8"	*9-3/4"	30-1/2"	120	24 Volt	2.18	500	12-1/2" adj.	3/8"
HEDV404A	L.P.	40,000	34-5/8"	*9-3/4"	30-1/2"	120	24 Volt	2.18	500	12-1/2" adj.	3/8"

*Does not include 5" Trim Kit . Total Depth 14-3/4"

Louisville Tin & Stove Co.

INCORPORATED

P.O. BOX 2767 • LOUISVILLE, KENTUCKY 40201-2767
PHONE: (502)589-5380 • FAX: (502)589-5382

WWW.cozyheaters.com
cozyinfo@aol.com



Manufacturers of heating equipment.

for over 122 years



AUDI MEMBER