

# COZY Vent-Free Heaters

*Cozy Comfort...with our Warmest Regards!*



COZY offers nine (9) models of **Vent-Free Heaters**. Six (6) **Infrared** units ranging from **5M BTU to 30M BTUs** and three (3) **Blue Flame Heaters** ranging from **10M BTU to 30M BTU** capacities. Vent-Free units combine **99.9% efficiency** with an **O.D.S. (Oxygen Depletion Sensor) pilot**, guaranteeing safe and dependable heating — **even during a power failure!** These high-performance units can be used to heat any room/zone, or serve as back-up to an electrically dependent primary heat system, at **one-third** the cost of electricity!

**Utility and dependability** are the by-words, with 5/5.5M, 10M and 20M BTU manually operated units (Infrared only) and six built-in thermostat units ranging from 10M, 20M and 30M BTUs. All **COZY** Vent-Free units may be wall mounted; with an **optional freestanding floor kit** (for the 10M, 20M & 30M) and **thermostatically controlled blower** available (for the 20M and 30M BTU units only).



**COZY** Vent-Free units feature the additional convenience of **matchless piezo ignition** and **top operated controls**. Their **neutral bone color, heavy gauge, textured steel cabinets** are enhanced by a **contrasting porcelain hearth and jamb assembly**, and **safety guard**. **COZY** is truly a stylish addition to any setting!

**LTS** 

Manufacturers of Heating Equipment Since 1888

[www.cozyheaters.com](http://www.cozyheaters.com)



# Performance Proven Features

9 Models to Choose From... 5,000 to 30,000 BTU



■ **Optional Thermostatic Blower** – mounts at unit rear to circulate heated air and prevent heat stratification (20M & 30M BTU units only). Shipping weight – 4 lbs. Operates at 50 CFM on 115V.

■ **Optional Freestanding Floor Kit** – for 10M (VF10 FSK), 20M (VF20 FSK), & 30M (VF30 FSK) BTU units only. Allows away-from-the-wall installation. Shipping weight – 2 lbs.

■ **Top Operated Controls** – facilitates “no stoop” operation.



VFT/BFT Top Control



VFM Top Control

■ **Piezo Ignitor** – requires no matches to light unit.

■ **Textured Steel Cabinet** – resists scratching and cleans easily with a damp cloth.

■ **Porcelain Hearth & Jamb Assembly** – resists heat discoloration, cleans easily with a damp cloth.

■ **Optional Gas Line Inlet Openings** – at unit rear and bottom for easy installation.


■ **Standard Wall Mount Bracket** – with each unit facilitates installation.

■ **Removable Lower Front Panel** – provides easy access for service and cleaning.

■ **Front Safety Guard** – prevents direct burner contact and injury.

■ **Thermostatic Controls** – are factory installed on 10M, 20M & 30M BTU models for further operating convenience.

■ **100% O.D.S. Safety Pilot** – assures safe operation and guards against oxygen depletion or gas flow interruption.

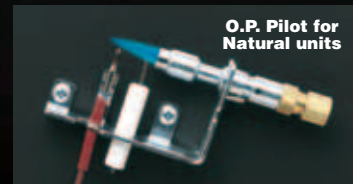

O.P. Pilot for Natural units



O.P. Pilot for L.P. units

## SPECIFICATIONS

	INFRA-RED VENT FREE HEATERS						BLUE-FLAME VENT FREE HEATERS		
	VFM63	VFM103	VFM203	VFT101	VFT201	VFT301	BFT101	BFT201	BFT301
Model No./Nat. Gas	VFM63	VFM103	VFM203	VFT101	VFT201	VFT301	BFT101	BFT201	BFT301
Model No./L.P. Gas	VFM104	VFM204	VFT102	VFT202	VFT302		BFT102	BFT202	BFT302
Control	MANUAL			THERMOSTAT BULB			THERMOSTAT BULB		
Height	22½"	22½"	22½"	22½"	22½"	22½"	22½"	22½"	22½"
Width	11½"	14 <sup>9</sup> / <sub>16</sub> "	20 <sup>11</sup> / <sub>16</sub> "	14 <sup>9</sup> / <sub>16</sub> "	20 <sup>11</sup> / <sub>16</sub> "	26 <sup>13</sup> / <sub>16</sub> "	14 <sup>9</sup> / <sub>16</sub> "	20 <sup>11</sup> / <sub>16</sub> "	26 <sup>13</sup> / <sub>16</sub> "
Depth	7"	7"	7"	7"	7"	7"	7"	7"	7"
Input (BTU/hr.)/Nat.	5,500	10,000	20,000	10,000	20,000	30,000	10,000	20,000	30,000
Input (BTU/hr.)/L.P.	5,000	10,000	20,000	10,000	20,000	30,000	10,000	20,000	30,000
Gas Supply Line Size	½"	½"	½"	½"	½"	½"	½"	½"	½"
Optional VFB Blower	No	No	Yes	No	Yes	Yes	No	Yes	Yes
Optional FSK	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Bathroom Installation	Yes	No	No	No	No	No	No	No	No
Bedroom Installation	Yes	Yes	No	Yes	No	No	Yes	No	No
Piezo Ignitor	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Shipping Weight	16 lbs.	22 lbs.	30 lbs.	22 lbs.	30 lbs.	35 lbs.	22 lbs.	32 lbs.	35 lbs.

All units must be installed by a qualified gas serviceman.

Note: Units are not field convertible from one gas to another.

Units installed at altitudes greater than 4,500 ft. may experience nuisance pilot outage.

Units installed in bathrooms and bedrooms **must be wall mounted**.

Consult local codes, regulations, and ordinances for approved use in your area.

## Louisville Tin & Stove Co.

INCORPORATED

P.O. BOX 2767 • LOUISVILLE, KENTUCKY 40201-2767

PHONE: (502)589-5380 • FAX: (502)589-5382

[www.cozyheaters.com](http://www.cozyheaters.com)

[cozyinfo@cozyheaters.com](mailto:cozyinfo@cozyheaters.com)



Manufacturers of heating equipment

for over 122 years

